

ARCHITECTURAL GRATES + DRAINS



65MNDTDi

Linear Drainage System

Stormtech is the only linear drainage system available with full Greentag and Watermark certification across our complete product range.

Telephone 01483 346460 | Web slimlinedrain.co.uk





ARCHITECTURAL
GRATES + DRAINS



65MNDDi

Linear Drainage System



The 65MNDDi is a Threshold Drain for door track with sub sill tray featuring our 65mm wide Marc Newson design grate.


For sliding and Hinged doors.

Featuring a linear stainless steel grate with concealed channel section connecting sill and sub-sill for door tracks and thresholds.

Allows door sills to be drained while having internal and external floor surfaces with no step down.

Please be aware that depending on the installation environment, for a pool installation or close to a surf beach, you may need to have your stainless steel grates electropolished.

Code 65MNDDi
Range Threshold
Grate Style MND
Category Made-to-Length
Channel Material Stainless Steel
Steel Grade 316



Grates longer than 1500mm supplied in sections.
 Tile Inserts longer than 1200mm supplied in sections.
 Channels over 3000mm supplied in sections with joiner.

SPECIFICATIONS + DIMENSIONS

Channel Width	75mm
Channel Depth	Adjustable
Length(s)	As Required
Outlet Size	N/A

STORMTECH COLOUR FINISHES



Electroplate finishes subject to natural variation with time and local environment. Factors such as pools/surf beaches may require electropolishing. Contact us for suitability.

PRODUCT APPLICATIONS

- Aged / Health Care Drainage
- Balcony Drainage
- Commercial Drainage
- Courtyard / Patio Drainage
- Multi-Residential Drainage
- Special Needs Drainage
- Threshold Drainage

Copyright © Stormtech Pty Ltd. Patent 733361. Drawings not to scale, please use dimensions shown.




Visit slimlinedrain.co.uk
for tools + inspiration.

Phone 01483 346460


Email technical@slimlinedrain.co.uk

65TDi Linear threshold Drainage System

For 65ARTDi, 65TRTDi, 65PSTDi

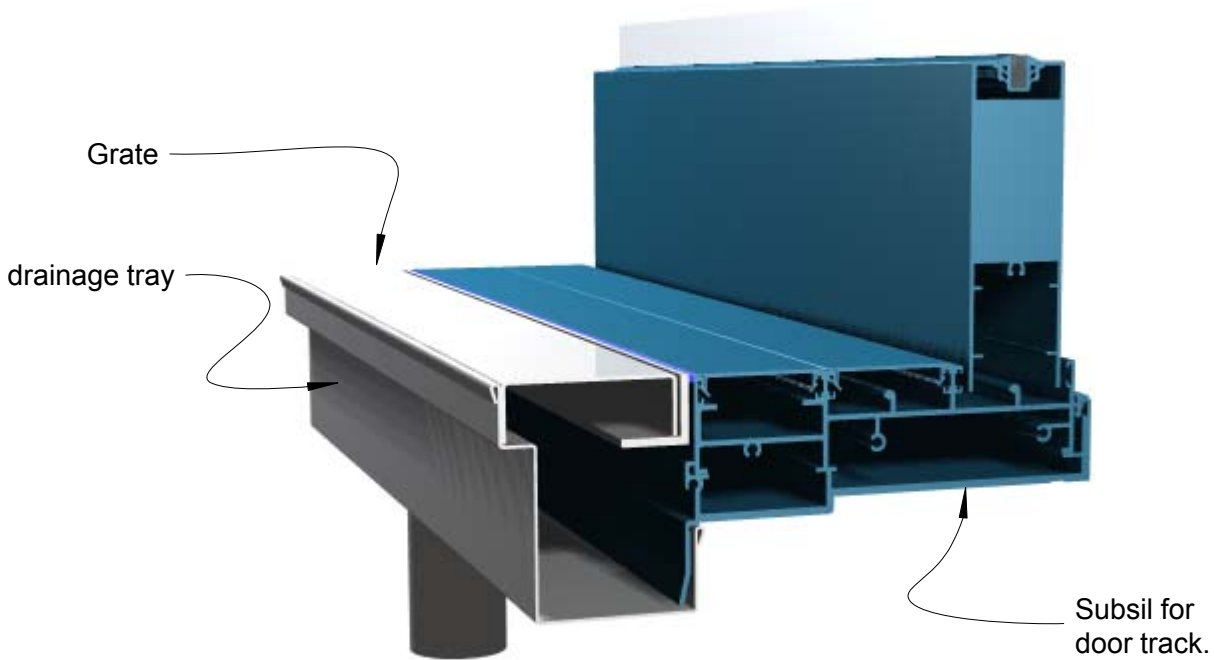

- * The entire door track and 65TDi are set in above and separate to waterproofing. Therefore waterproofing must be completed first.
- * Install the door track sub-sil.
- * When installing the 65TDi, the tray needs to be slightly deeper than the lowest part of the Sub-sil.
- * Standard installation sequence generally has the door track sub-sil in place before the drain. Therefore the tray may need to be slightly deeper than lowest part of the sub-sil to allow the drain channel to slide underneath the sub-sil.
- * Refer to; AS1428 Design for Access and Mobility AS4654 for waterproofing
- * Lengths longer than 3m have saddle joints in the channel. Use Sika 11FC and primer 215 to seal the saddle joints.

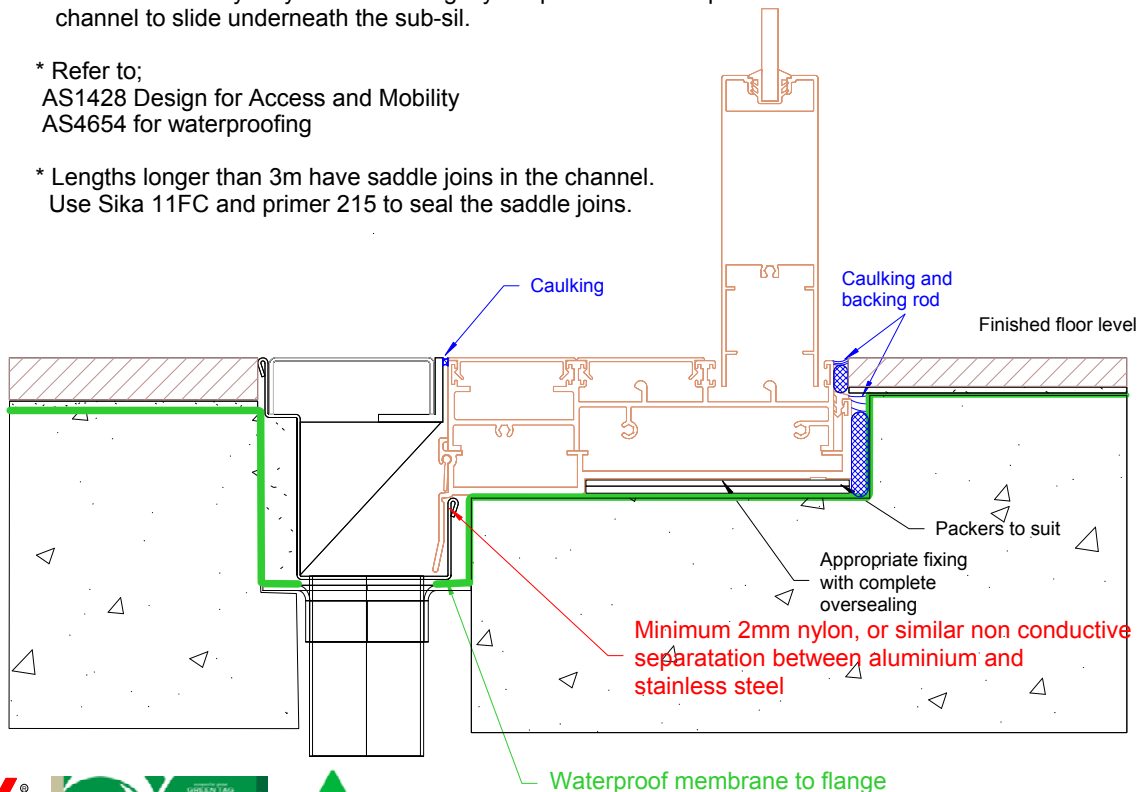

Visit slimlinedrain.co.uk

